

CAPICORDA PER RETI DI TERRA E APPLICAZIONI SPECIALI

COLLETTO LUNGO - DOPPIA AGGRAFFATURA 4÷1000 mm²

EARTH NETWORK AND SPECIAL APPLICATIONS TERMINALS

LONG NECK - DOUBLE CRIMPING 4÷1000 mm²

MATERIALE Tubo rame stagnato



MATERIAL Tinned copper tube

Capicorda ricavati da tubo di rame e stagnati elettroliticamente.


Particolarmenete robusti vengono normalmente impiegati per la messa a terra di strutture ed apparecchiature sia in ambienti chiusi che all'esterno. Trovano largo impiego negli impianti a media tensione, dove sono richieste particolari doti di resistenza alle sollecitazioni elettrodinamiche.



Copper tube terminals electrolytically tinned.

As these terminals are very strong, they are used in constructions and electrical earthing equipment, suitable for both inside and outside environments. They are also greatly used in the medium tension installations where particular strength characteristics to electrodynamic stress are requested.

ARTICOLO ARTICLE	SEZIONE WIRE RANGE mm ²	D PER VITE SCREW	C	B	L	A	M	N	PEZZI PER CONFEZ. PCS PER BOX
CT 4L	4-6	4	3,7	11	26	10	7	5	100
CT 5L	4-6	5	3,7	11	26	10	7	5	100
CT 6L	4-6	6	3,7	11	29	10	8	7	100
CT 8L	4-6	8	3,7	13	32	10	9	8	100
CT 10L	4-6	10	3,7	15	36	10	11	10	100
D 4L	10	4	4,6	11	32,5	12	8	6	100
D 5L	10	5	4,6	11	32,5	12	8	6	100
D 6L	10	6	4,6	11	33,5	12	8,5	6	100
D 8L	10	8	4,6	13	35	12	9	8	100
D 10L	10	10	4,6	15	41	12	11	10	100
D 12L	10	12	4,6	18	48,5	12	13	12	100
E 4L	16	4	6	12	35	15	8	6	100
E 5L	16	5	6	12	35	15	8	6	100
E 6L	16	6	6	12	36	15	8,5	6	100
E 8L	16	8	6	13	38	15	9	8	100
E 10L	16	10	6	15	42,5	15	11	10	100
E 12L	16	12	6	18	46	15	13	12	100
F 4L	25	4	7	13	38	17,5	8	6	100
F 5L	25	5	7	13	38	17,5	8	6	100
F 6L	25	6	7	13	39	17,5	8,5	6	100
F 8L	25	8	7	13	41	17,5	9	8	100
F 10L	25	10	7	15	45	17,5	11	10	100
F 12L	25	12	7	18	50	17,5	13	12	100
G 6L	35	6	9	17	48	23	8	6	100
G 8L	35	8	9	17	48	23	9	8	100
G 10L	35	10	9	17	53	23	11	10	100
G 12L	35	12	9	19	56	23	13	12	100
G 14L	35	14	9	21	61	23	15	14	100
G 16L	35	16	9	23	63	23	17	16	100
H 6L	50	6	10	20	51	25	9	6	50
H 8L	50	8	10	20	52	25	10	8	50
H 10L	50	10	10	20	54	25	11	10	50
H 12L	50	12	10	20	60	25	13	12	50
H 14L	50	14	10	21	65	25	15	14	50
H 16L	50	16	10	23	69	25	17	16	50
I 6L	70	6	12	22	60	30	11	6	50
I 8L	70	8	12	22	60	30	11	9	50
I 10L	70	10	12	22	62	30	12	11	50
I 12L	70	12	12	22	65	30	13	12	50
I 14L	70	14	12	22	69	30	15	14	50
I 16L	70	16	12	23	74	30	17	16	50
I 18L	70	18	12	24	77	30	19	18	50
I 21L	70	20	12	27	77	30	20	20	50
L 8L	95	8	13,7	26	68	34	11	10	25
L 10L	95	10	13,7	26	69	34	13	12	25
L 12L	95	12	13,7	26	72,5	34	14	12	25
L 14L	95	14	13,7	26	76	34	15	14	25
L 16L	95	16	13,7	26	79	34	17	16	25
L 18L	95	18	13,7	26	85	34	19	18	25
L 21L	95	20	13,7	26	90	34	21	20	25

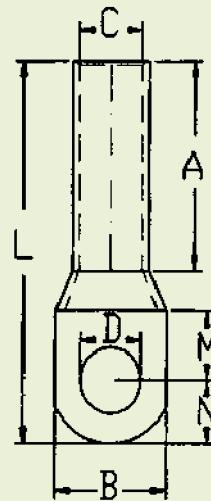

CAPPUCCI ISOLANTI
PER CAPICORDA DA TUBO.
COLORE NERO TIPO P

SOFT SLEEVES FOR
TUBE TERMINALS
COLOUR BLACK - TYPE P

